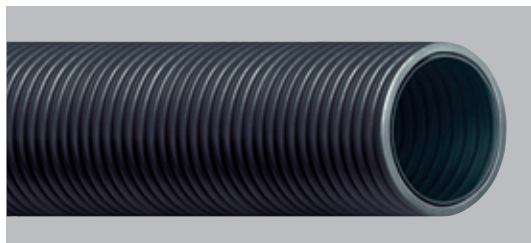


StabilTWIN BARRE 450

TUBO CORRUGATO DOPPIA PARETE IN PE NORMA CEI EN 61386-24

TUBO RIGIDO CORRUGATO IN PE PER PROTEZIONE CAVI in barre da mt. 3-6.

Fornito nel colore grigio-nero, compreso n° 1 manicotto a corredo.



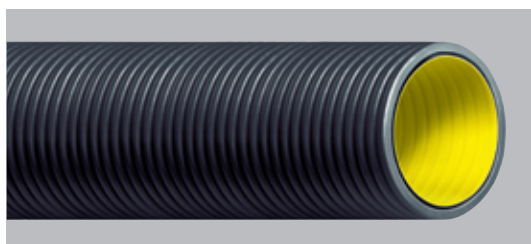
450 NEWTON serie N



Ø esterno mm	110	125	160	200
Ø interno mm	94	107	138	180
Imballi	105	85	52	30
Barre m. 6 prezzo ml €	2,92	3,66	5,81	10,19
Barre m. 3 prezzo ml €	3,07	3,84	6,10	10,70

Marcatura: TWIN CDP NF Ø TCP - N - 450 CEI EN 61386-24 - IEMMEQU CE

StabilTWIN BARRE 750



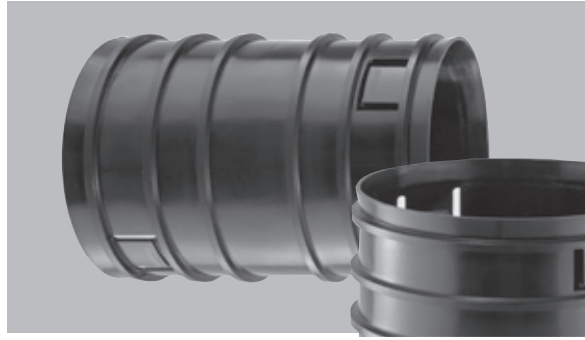
750 NEWTON serie N






Ø esterno mm	110	125	160	200
Ø interno mm	94	107	138	180
Imballi	105	85	52	30
Barre m. 6 prezzo ml €	3,93	5,06	7,37	11,66
Barre m. 3 prezzo ml €	4,14	5,31	7,74	12,24


Marcatura: TWIN CDP NF Ø TCP - N - 750 CEI EN 61386-24 - IEMMEQU CE

Accessori



Manicotto di giunzione mm	40	50	63	75	90	110	125	160	200
 Prezzo € /cad.	1,19	1,34	1,40	1,73	1,80	2,19	4,11	5,27	7,61
TAPPI  Prezzo € /cad.	0,50	0,60	0,70	0,80	1,00	1,50	1,60	1,80	2,10

SELLETTE A DUE GOLE	Ø	€ / CAD.	IMBALLO
	110	3,20	50
	125	3,35	50
	160	4,10	50

SELLETTE A TRE GOLE	Ø	€ / CAD.	IMBALLO
	110	4,30	30
	125	5,10	30



POZZETTI di ISPEZIONE
per linee elettriche interrato

POZZETTO E COPERCHIO	mm 200 X 200	mm 300 X 300	mm 400 X 400
Prezzo € /cad.	7,10	16,90	41,50