


StabilTWIN BARRE 450

TUBO CORRUGATO DOPPIA PARETE IN PE NORMA CEI EN 61386-24
 TUBO RIGIDO CORRUGATO IN PE PER PROTEZIONE CAVI in barre da mt. 3-6.
 Fornito nel colore grigio-nero, compreso n° 1 manicotto a corredo.




450 NEWTON serie N

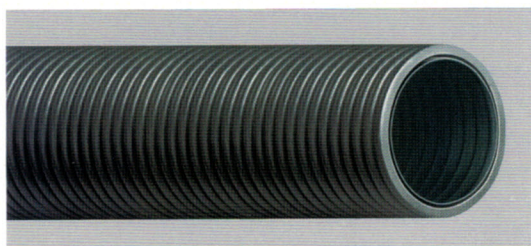

Ø esterno mm	110	125	160	200
Ø interno mm	94	107	138	180
Imballi	105	85	52	30
Barre m. 6 prezzo ml €	3,35	4,21	6,68	11,72
Barre m. 3 prezzo ml €	3,52	4,42	7,02	12,30

Marcatura: TWIN CDP NF Ø TCP - N - 450 CEI EN 61386-24 - IEMMEQU CE

StabilTWIN BARRE 750

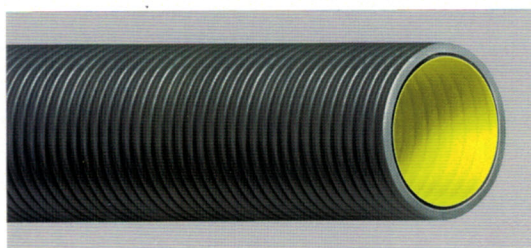

750 NEWTON serie N



Ø esterno mm	110	125	160	200
Ø interno mm	94	107	138	180
Imballi	105	85	52	30
Barre m. 6 prezzo ml €	4,52	5,82	8,48	13,41
Barre m. 3 prezzo ml €	4,75	6,11	8,90	14,08

Marcatura: TWIN CDP NF Ø TCP - N - 750 CEI EN 61386-24 - IEMMEQU CE