



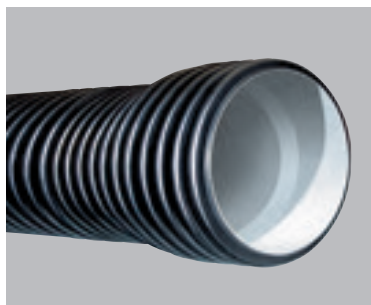

Norma
UNI EN 13476-3



Tubo corrugato in PP (polipropilene alto modulo) a doppia parete per condotte di scarico interrate non in pressione conformi alla Norma UNI EN 13476-3 normalizzato sul diametro Interno.

TWIN ECO - SN4 Rigidità anulare 4 KN/m²

Ø interno DN/ID mm	200	250	300	400	500	600	800*	1000*
Ø esterno mm	225,3	282,6	339,7	451,1	563,2	677	931	1200
Barre m. 6 Prezzo ml €	20,14	28,04	41,60	63,12	113,84	165,67	362,80	600,89
Barre m. 3 Prezzo ml €	21,75	30,28	44,93	68,17	122,95	178,92	-	-
Lunghezza bicchiere mm	106	122	149	170	195	235	-	-
Imballo n° barre	27	18	10	6	4	sfuso	sfuso	sfuso

N°1 GUARNIZIONE A CORREDO



Norma
UNI EN 13476-3

TWIN ECO - SN8 Rigidità anulare 8 KN/m²

Ø interno DN/ID mm	200	250	300	400	500	600	800*	1000*
Ø esterno mm	225,3	282,6	339,7	451,1	563,2	677	931	1200
Barre m. 6 Prezzo ml €	21,68	31,58	47,20	76,33	126,04	183,83	402,58	691,02
Barre m. 3 Prezzo ml €	23,41	34,11	50,98	82,44	136,12	198,54	-	-
Lunghezza bicchiere mm	106	122	149	170	195	235	-	-
Imballo n° barre	27	18	10	6	4	sfuso	sfuso	sfuso

N°1 GUARNIZIONE A CORREDO



Norma
UNI EN 13476-3

TWIN ECO - SN16 Rigidità anulare 16 KN/m²

Ø interno DN/ID mm	200	250	300	400	500	600	800*	1000*
Ø esterno mm	225,3	282,6	339,7	451,1	563,2	677	931	1200
Barre m. 6 Prezzo ml €	32,02	47,60	82,40	139,56	204,00	319,61	570,48	849,03
Barre m. 3 Prezzo ml €	34,58	51,41	88,99	150,72	220,32	345,18	-	-
Lunghezza bicchiere mm	106	122	149	170	195	235	-	-
Imballo n° barre	27	18	10	6	4	sfuso	sfuso	sfuso

* DIAMETRI COMMERCIALIZZATI * CON MANICOTTO

N°1 GUARNIZIONE A CORREDO